

MD3112

Series




Mäglung

Mäglung



Linear drawings

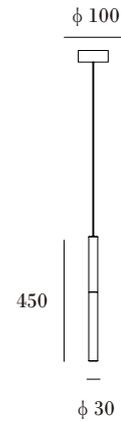

MD3112-L

Detailed parameters


Product Weight	1.68KG
Finishing Process	Painting, electroplating
Surface mount shape/diameter	Round 24CM
Power Method	120V
Cable Spec	H03VV-F 2×0.75mm ²
Cable Type/Length	Black PVC,1500MM
Light Source	6W LED
Max Wattage	12W
Lumens	800
CRI	>90
Colour Temperature	3000K
Dimmability	Non-dimmable
Voltage	220-240V
Environment	Indoor
Certification /Electrical Class	Certified for NZ/AUS

<i>Color process</i>	<i>Gold</i>
<i>Material used</i>	<i>Aluminum</i>
<i>Surface treatment/process</i>	<i>Paint</i>
<i>Service provision</i>	<i>Fast shipping</i>

Mäglung



Linear drawings



Detailed parameters


Product Weight	1.68KG
Finishing Process	Painting, electroplating
Surface mount shape/diameter	Round 24CM
Power Method	120V
Cable Spec	H03VV-F 2×0.75mm ²
Cable Type/Length	Black PVC,1500MM
Light Source	6W LED
Max Wattage	12W
Lumens	800
CRI	>90
Colour Temperature	3000K
Dimmability	Non-dimmable
Voltage	220-240V
Environment	Indoor
Certification /Electrical Class	Certified for NZ/AUS

<i>Color process</i>	<i>Gold</i>
<i>Material used</i>	<i>Aluminum</i>
<i>Surface treatment/process</i>	<i>Paint</i>
<i>Service provision</i>	<i>Fast shipping</i>

Mäglung



Linear drawings

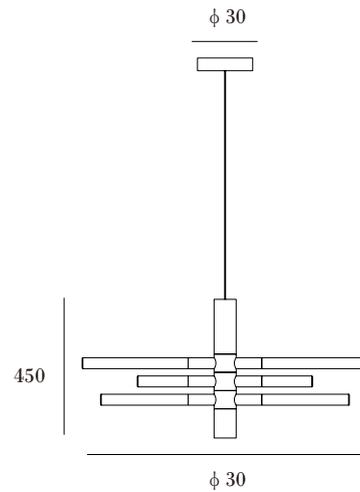

MD3112-L

Detailed parameters


Product Weight	1.68KG
Finishing Process	Painting, electroplating
Surface mount shape/diameter	Round 24CM
Power Method	120V
Cable Spec	H03VV-F 2×0.75mm ²
Cable Type/Length	Black PVC,1500MM
Light Source	6W LED
Max Wattage	12W
Lumens	800
CRI	>90
Colour Temperature	3000K
Dimmability	Non-dimmable
Voltage	220-240V
Environment	Indoor
Certification /Electrical Class	Certified for NZ/AUS

<i>Color process</i>	<i>Gold</i>
<i>Material used</i>	<i>Aluminum</i>
<i>Surface treatment/process</i>	<i>Paint</i>
<i>Service provision</i>	<i>Fast shipping</i>

Mäglung



Linear drawings

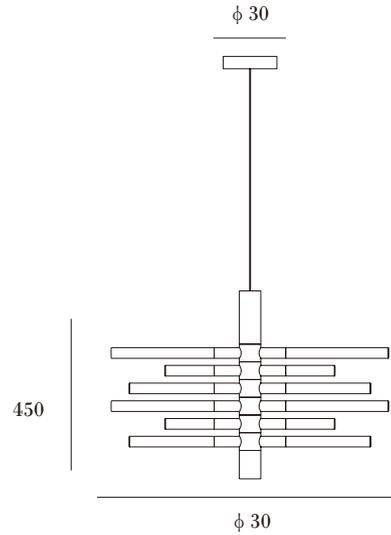

Detailed parameters


Product Weight	1.68KG
Finishing Process	Painting, electroplating
Surface mount shape/diameter	Round 24CM
Power Method	120V
Cable Spec	H03VV-F 2×0.75mm ²
Cable Type/Length	Black PVC,1500MM
Light Source	6W LED
Max Wattage	12W
Lumens	800
CRI	>90
Colour Temperature	3000K
Dimmability	Non-dimmable
Voltage	220-240V
Environment	Indoor
Certification /Electrical Class	Certified for NZ/AUS

<i>Color process</i>	<i>Gold</i>
<i>Material used</i>	<i>Aluminum</i>
<i>Surface treatment/process</i>	<i>Paint</i>
<i>Service provision</i>	<i>Fast shipping</i>

Mäglung



Linear drawings

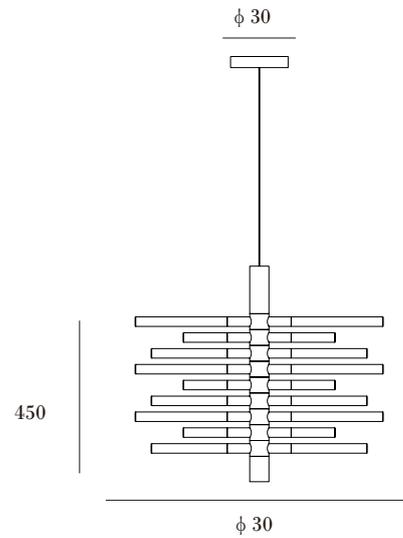

Detailed parameters

Product Weight	1.68KG
Finishing Process	Painting, electroplating
Surface mount shape/diameter	Round 24CM
Power Method	120V
Cable Spec	H03VV-F 2×0.75mm ²
Cable Type/Length	Black PVC,1500MM
Light Source	6W LED
Max Wattage	12W
Lumens	800
CRI	>90
Colour Temperature	3000K
Dimmability	Non-dimmable
Voltage	220-240V
Environment	Indoor
Certification /Electrical Class	Certified for NZ/AUS

<i>Color process</i>	<i>Gold</i>
<i>Material used</i>	<i>Aluminum</i>
<i>Surface treatment/process</i>	<i>Paint</i>
<i>Service provision</i>	<i>Fast shipping</i>